



# Product Specification Sheet




APS045

Rev. 3 - 02/2009



**K26 Loose Key Type**

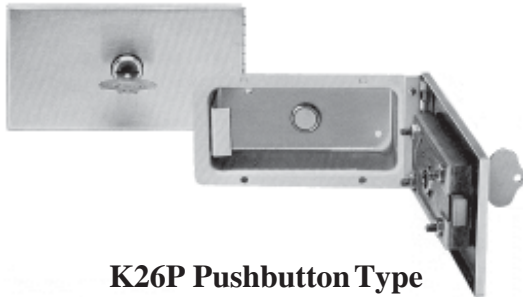

**K26P Pushbutton Type**



**K26R Retractor Reel Type**

## ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The key keeper(s) shall be Alpha Communications®/ Florence K26 series, or approved equal. Key Keeper faceplate shall be constructed of heavy duty stainless steel. The key keeper shall be ('loose key' model K26, 'retractor reel' model K26R or 'push-button' type model K26P). The Key Keeper(s) shall be flush mounted into the finished wall surface. The Key Keeper door hinge shall be fully hinged to minimize vandalism and unauthorized opening. Contractor shall install the key Keeper as per all U.S. Postal Service regulations. Key Keeper(s) shall include postal lock mounting bracket and screws required. Key Keeper shall be mounted (horizontally or vertically). Contractor shall install as per USPS regulations, and local and national building codes.

## K26 Series Stainless Steel Flush Mount Key Keepers

The Alpha Communications® K26 series flush mount key keepers are designed specifically to mount in conjunction with stainless steel lobby panels, directories or mail boxes, or where a heavy-duty vandal-resistant key keeper is required.

The K26 series key keepers are U.S. Postal Service Approved, and are required when mailboxes are installed behind a locked entry door. This allows the Postman access to the mail boxes, without having to bother (or wait for) any of the building's tenants.

These key keepers can be mounted vertically or horizontally and include the mounting hardware for the installation of the postal lock (supplied by the local post office).

The K26 series key keepers are designed to be flush mounted only. U.S. Postal Service regulations do not allow for a key keeper to be surface mounted. The K26 series key keepers are available in three (3) types: 'loose key' (*model K26*), with a 'built-in momentary push-button' (*model K26P*), or with a 'built-in retractable reel and (20 inch) chain' (*model K26R*).

### FEATURES

- Rugged Stainless Steel Front Faceplate
- Tamper and Vandal-Resistant
- Easy Installation
- Can be Mounted Vertically or Horizontally
- Mounts flush into the Finished Wall
- Available in 'Loose-Key', 'Retractor Reel', or 'Push-button' styles
- Hinges open on Full Length Hinge Assembly (short side)
- U.S. Postal Service Approved

### SPECIFICATIONS

- Dimensions:** Wall Opening: 5.06"W (129mm) x 2.56"H (65mm) x 2.63"D (67mm) installed horizontally. Outside Dimensions: 6.50"W (165 mm) x 4.00"H (102mm) installed horizontally.
- Construction:** Heavy Duty Stainless Steel Faceplate.
- Hinge Type:** Full length hinge assembly on short side.
- Mounting:** Flush. Predrilled mounting holes.
- Models:** *K26* 'Loose-Key' Type.  
*K26P* Built-in 'Push-Button' Type, (with normally open type push-button).  
*K26R* Built-in 'Reel with 20" Chain' Type.

*Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice.*

Copyright© 1995-2009, Alpha Communications®, All Rights Reserved