

**BE005
BE007**

BE005 / BE007 Vibrating Bells

The Alpha Communications® bell models BE005 (24VAC) and BE007 (24VDC) are for use in general alarm applications and are UL Listed. They are used primarily with our CM800 series emergency-call systems.

The bells produce a long, continuous ringing sound and feature low power drain and shockproof construction. Each model is supplied complete with plate and is ideally suited for general alarm applications of medium ambient level.

SPECIFICATIONS

Bell Size:	6.00" (153mm)
Diameter:	6.00" (153mm)
Depth:	2.875" (74mm)
Amps:	BE005 - .35 BE007 - .062
VA:	BE005 - 8.4 BE007 - 1.5
dB at 10 feet:	92

Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice.

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS


Alpha Communications®/Tektone BE005 or BE007 bells shall be made of a rugged die-cast housing and include a self compensating solenoid plunger which needs no adjustment.

The BE005 will operate on 24 VAC and the BE007 on 24 VDC and both shall mount on a standard 4"-square electric box.


All necessary installation hardware shall be provided, including 6" bell.

SIMPLE 3-STEP INSTALLATION (For BE005 Bell)


Universal Adaptable mounting plate mounts directly on surface or fits any single-gang opening or any 3¼", 3½" or 4" octagon box or any plaster cover with mounting holes on 2¾" centers. Permits quick, easy installation in three simple steps.

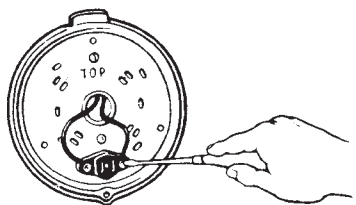

1. Pull wires through spacious center hole and connect to large binding posts.

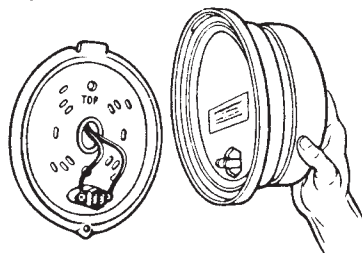

2. Slip BE005 bell onto sturdy hanger and push home.

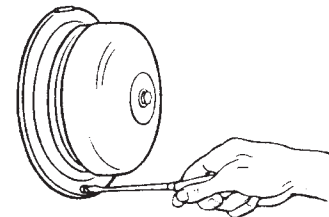

3. Tighten one (1) screw and installation is complete.