




# Product Specification Sheet



APS400  
Rev. 2 - 04/2006

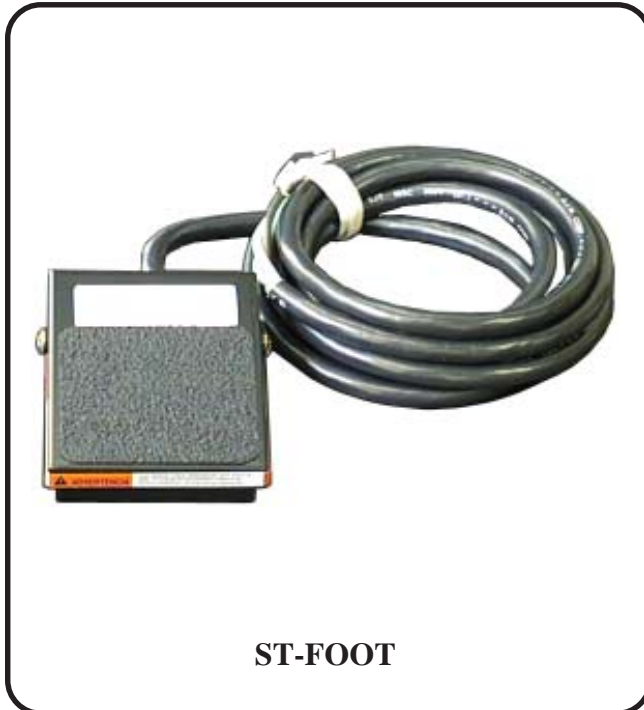

ST-FOOT

## ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The momentary foot pedal switch unit(s) shall be Alpha Communications® model ST-FOOT or approved equivalent.

Foot pedal switch unit(s) shall be SPST momentary type (normally open). Unit shall be provided with a six (6) foot flexible connecting cable, in a matching Grey finish. Cable shall have 3- #18AWG conductors (Black and White for normally open connections and Green for ground if needed). Foot pedal shall be non-skid type.

Contractor shall observe all local and national electrical and building codes.

## ST-FOOT Momentary Foot Pedal Switch

The Alpha Communications® model ST-FOOT momentary foot pedal switch can be used with a variety of intercom and control systems. The ST-FOOT is normally used in applications such as bank teller windows, ticket windows, drive-thru fast food restaurant windows, operating rooms, x-ray rooms and other places where the operator cannot use their hand(s) to operate an intercom or control device.

### FEATURES

- Rugged Momentary Electrical Switch Component
- Non-Skid Pedal Finish
- Comes with heavy duty 6 foot grounded cord
- 'Normally Open' switch mechanism

### ELECTRICAL SPECIFICATIONS

<b>Switch:</b>	SPST momentary 'Normally Open' type switch
<b>Cord/Cable:</b>	3 conductor #18AWG connecting cord
<b>Finish:</b>	Grey painted finish
<b>Pedal Unit:</b>	Non-Skid Pedal Unit

### MECHANICAL SPECIFICATIONS

<b>Dimensions:</b>	3.50"H x 2.63"W x 1.00"D (89mm x 67mm x 26mm)
<b>Weight:</b>	2.0 lbs. (909 grams)

### OPTIONAL MODEL

<b>ST-FOOT-P</b>	Same as model# ST-FOOT, except it has a 1/4" male phono plug at the end of the cable instead of wire pigtail leads.
------------------	---



*Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice.*