




Product Specification Sheet



APS437

Rev. 1 - 06/2000

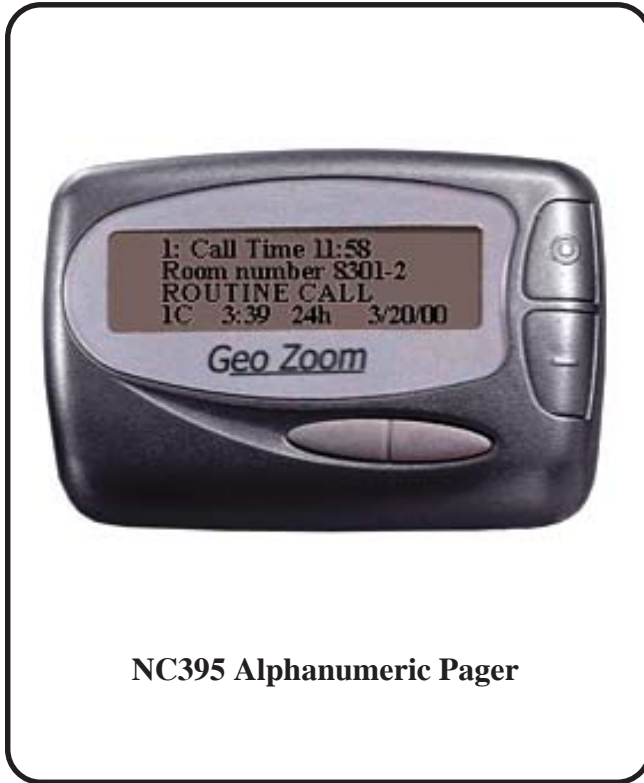

NC395 Alphanumeric Pager

ARCHITECTS' AND ENGINEERS' SPECIFICATION

Alphanumeric pager(s) shall be a Alpha Communications® NC395 GEOZoom or approved equal. It shall have a large 2 or 4 line display and shall be capable of storing up to 60 messages. The unit shall have a four (4) button design for ease of operation and shall provide a variety of tones and vibrating modes for page annunciation. A matching holster with a belt clip shall be provided with each unit.

The NC395 can be programmed to receive patient call information from Alpha Communications® NC 205 Nurse Call Systems via Alpha Communications® NC365A/AT Transmitter/Control Unit, as well as from Alpha Communications® NC300 Nurse Call Systems. The alphanumeric patient call system shall be displayed as generated by the nurse call system and the pager shall generate annunciation either by sound or by vibration.

Copyright© 2000, Alpha Communications®, All Rights Reserved

NC395 GEOZoom Alphanumeric Pager

The NC395 Alphanumeric Pager is a radio pager receiver with a large selectable 2 or 4 line display, and is designed for use with Alpha Communications® NC205 Nurse Call Systems as well as Alpha Communications® NC300 Nurse Call and HC345C Emergency Call Systems. The NC395 will store up to 60 messages. Messages may be selectively deleted or locked into memory. Messages not locked into memory are automatically deleted as new messages arrive beyond the 60 message limit, with the oldest message being the first deleted. The unit can be configured for annunciation via vibration as well as audible tones. The unit has one alarm for daily annunciation. The display is backlit for viewing under low lighting.

The NC395 has been programmed to receive patient call information from Alpha Communications® NC 205 Nurse Call System via Alpha Communications® NC365A/AT Transmitter/Control Unit, as well as Alpha Communications® NC300 Nurse Call System and HC345C Emergency Call System.

FEATURES

- Alphanumeric Display
- Two or Four line selectable display with scrolling ability
- Easy to use four (4) button design
- Configurable for audible alert as well as vibrate alert
- Matching belt-clip holster

SPECIFICATIONS

Dimensions: Height: 1.70" (43mm) (not including holster)
Width: 2.60" (66mm)
Depth: 0.80" (20mm)

Construction: Electronic components surface mounted on PCB enclosed in an ABS plastic housing.

Operating Frequency: 457.550 MHz

Operating Voltage: 1.5 vDC (AAA cell) (batteries not included)

Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice.