



PM151/4 Module
(shown without any lens caps)

PM151/4 Door Station Adaptor

The PM151/4 4-lamp Door Station Adaptor is specifically designed to work with the NC150N master station(s) and is used to permit communications with remote speakers located at entrances or at any location where visual signaling is not required or desired.

Each PM151/4 will permit connection of up to 4 remote stations. Calls from remote stations are indicated by tone and by lamp annunciation. Tone calling and communication to remotes is permitted by use of the NC150N TALK and CALL buttons.

FEATURES

- Modular Design
- Protected Markings, Up to 4 digits per lamp
- Easy Installation
- Push-button Operation
- Lamp and Tone Call Annunciation

SPECIFICATIONS

Dimensions: Height: 0.75" (19mm)
Width: 3.50" (89mm)
Depth: 3.25" (83mm)
Projects: 0.50" (13mm) from panel module.

Controls: Push-push-type switch, one per lamp/switch circuit.

Power: .03 Amp per lamp


Connection: Positive screw terminals

Mounting: Mounts on NC150N and/or AM100 module(s)

Indicators: Lamp indication

Markings: Suitable marking by stamping or dry transfer method. Use our model # RP021CM.

SYSTEM WIRING LAYOUT

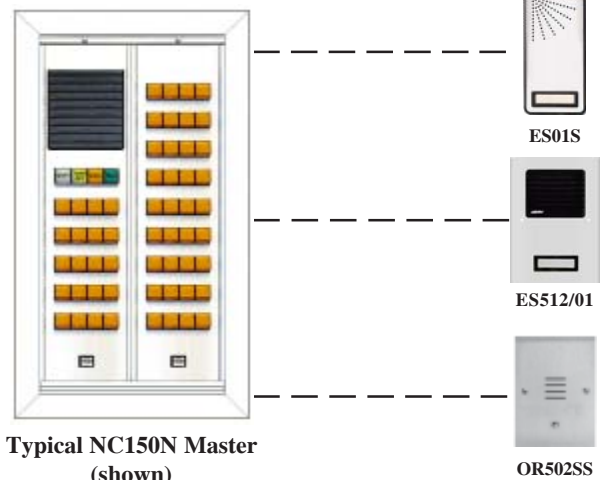

NOTE: Dotted lines indicate wiring required to each remote station- 3 Conductor #22 twisted pair (shielded when not in conduit).

Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice.