


RF Messenger

RF Messenger from Alpha Communications® is a wireless paging system designed to send alphanumeric messages to specific personnel using pocket pagers from a personal computer.

RF Messenger consists of computer software, a paging transmitter, and any number of pagers. The paging transmitter receives messages typed on a personal computer via a serial port (cable included). The transmitter then instantly sends the message to a specific person wearing a pocket pager. There are no monthly service charges for paging since you own the transmitter and pager(s). Note: It is possible to configure the system to send messages to groups of people.

Sending a message to a specific person is as easy as clicking on that person's name with your mouse, typing the message (up to 80 characters) then clicking on the "SEND" button. Since RF Messenger runs in Windows, it may be left "open" while other applications are run and be activated instantly when needed.

RF Messenger is a suitable messaging system for work environments where people are moving around and may not be able to hear the building's overhead voice paging system. The pocket pagers have a vibrate mode which enables the message recipient to "feel" that a message has been received. The vibrate mode is also useful for silently delivering messages to

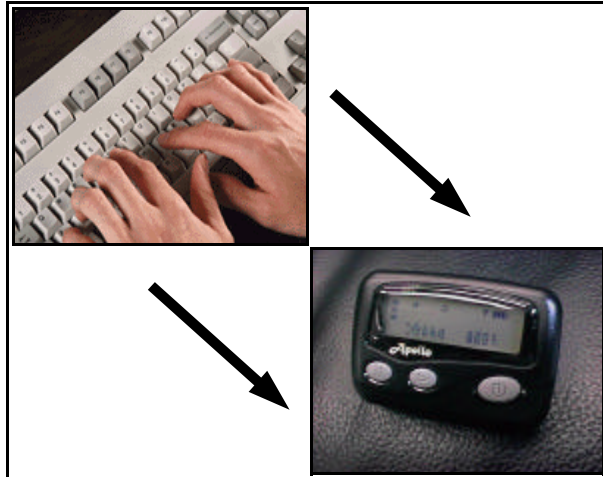

personnel without disturbing others. A UHF antenna is included (attaches directly to the transmitter).

The *Memo Page* feature allows up to 300 alphanumeric memo's to be sent to specific pagers at user specified times on user specified days of the week (or on a specified date). This feature can be used to remind nursing staff to administer medication to patients. Memo can include type and dosage information.

RF Messenger can be used alone or used in conjunction with any other Alpha Communications® pocket paging system. There are versions available for individual PC's and for LAN's.

Specifications:

Message type and length:	alphanumeric, up to 80 characters
Hardware requirements:	PC using Windows, (1) RS-232 serial port, 3.5" disk drive, mouse
Hard disk space required:	256K
Transmitter dimensions	11.1" x 8.66" x 1.8"
Pager type:	alphanumeric, tone and vibrate alert modes
Paging range:	one mile (maximum)
Max. number of pagers:	unlimited
Transmitter power supply:	12VDC (included)

Alpha Communications®

42 Central Drive, Farmingdale NY 11735-1202

Toll-Free: 1-800-666-4800 • www.AlphaCommunications.com